

SwivelPar

product specification

Future Light Inc.

www.future-light.com TEL 800.581.5536 FAX 440.779.4159

APPLICATIONS

- Banquet facilities
- Residential lighting
- Special event tent lighting
- Hotel, meeting and ballrooms

DESCRIPTION

SwivelPar provides a fast and easy way to convert recessed or fixed lighting into more interesting accent or task lighting. It combines the styling and function of a theatrical par can with the simplicity of a screw-in extension which is readily focused (aimed) to highlight food displays, centerpieces, podiums and task areas. Color filters are easily fitted for creative effects.

SPECIFICATIONS

The lighting unit shall use a ratcheting base which screws into a standard medium screw socket and locks the 360° pan adjustment. A yoke with tension knob shall lock the 270° tilt adjustment. The theatrical-style Par20 fixture shall readily accept color filters mounted in a frame and secured in place with a spring-loaded clip. The unit shall utilize 120V R20 and Par20 lamps in addition to other smaller medium screw base 120V lamps.

DIMENSIONS

Unit measures 14"H x 6"D x 3"W and weighs 14 oz. without lamp.


Also available from Future Light

Orchestra Shell Lighting, TileMount, Airwall Hanger, C-Clip Truss Protector, Virtual Light Lab Software



ruture Light inc.

Cleveland, Ohio info@future-light.com

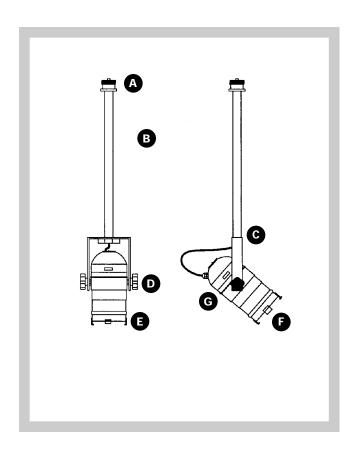

SwivelPar

product specification

Future Light Inc.

- A Ratcheting medium screw base provides 360° pan
- B 7 or 11"L stem from base to yoke
- C Yoke is fixed to stem to provide rotation control
- D Tension knob locks 270° tilt adjustment
- Frame accepts theatrical gels or dichroic filters
- F Spring-loaded clip secures frame
- **G** Lamp access without need to remove fixture

FEATURES

SwivelPar provides a fast and easy way to convert recessed or fixed lighting into more interesting accent or task lighting. It combines the styling and function of a theatrical par can with the simplicity of a screw-in extension which is readily focused (aimed) to highlight food displays, centerpieces, podiums and task areas. Color filters are easily fitted for creative effects.

TECHNICAL SPECIFICATIONS

The lighting unit shall use a ratcheting base which screws into a standard medium screw socket and locks the 360° pan adjustment. A yoke with tension knob shall lock the 270° tilt adjustment. The theatrical-style Par20 fixture shall readily accept color filters mounted in a frame and is which shall be secured in place with a spring-loaded clip. The unit shall utilize 120V R20 and Par20 lamps in addition to other smaller medium screw base 120V lamps.

OTHER PRODUCTS



TileMount



C-Clip



Airwall Hanger



FL 1000



FL 650



MR 16



Future Light Inc.

Cleveland, Ohio

info@future-light.com TEL 800.581.5536 FAX 440.779.4159